



Ganzhou Aluminium Co.,Ltd

<http://www.ganzhou-alu.com>

export@ganzhou-alu.com

Aluminium coilstock for canbody,canlid and canring

We are main manufacturer for aluminium canstock which is used in canbody,canlid and canring.

We also have a high speed automatic aluminium canlid production lines which can produce about 180000 pcs canlid daily.

And our canstock are used in our plant and also in our cooperated canbody manufacturers. The following is specifiaction of our canstocks:

Aluminum coils for aluminum can body

Alloy type: 3104

Thickness: 0.2-0.28mm made by customer's order (+/-0.003mm)

Width: Made by customer's order (peocessed by slitter device) (+1.5mm--0mm)

UTS (MPa): 265-290

TYS (MPa): 290-330

Roughness:40-55um

Earing: 3% max

Coil weight: 7000kgs--12000kgs

Application: Beverage can, beer can, juice, and so on





Ganzhou Aluminium Co.,Ltd

<http://www.ganzhou-alu.com>

export@ganzhou-alu.com

Aluminum coils for aluminum end

Alloy type: 5052 5182 H19 H48 H49

Thickness: 0.208mm 0.216mm 0.224mm 0.249mm MAX thickness 0.3mm (+/-0.003mm)

Width: Made by customer's order (peocessed by slitler device) (+1.5mm--0mm)

UTS (MPa): 330-365

TYS (MPa): 380-420


Coating: PPG, Akzo, Valspar, inner coating is EPOXY of 12-13um, outside coating is EPOXY of 4-5um.

Roughness:35-50um

Standard: EN 541 and EN 573-3

Coil weight: 2500kgs-3500kgs per Roller

Its surface is processed by the Electrostatic spray wax

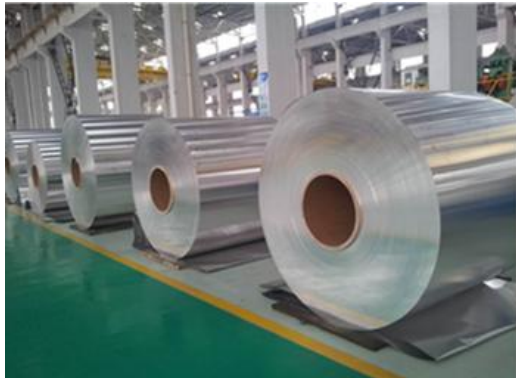



Ganzhou Aluminium Co.,Ltd

<http://www.ganzhou-alu.com>

export@ganzhou-alu.com

Aluminum coils for ring-pull Tab

Alloy type: 5182 H19 H48 H49

Thickness: 0.279mm 0.287mm 0.292mm MAX 0.45mm (+/-0.003mm)

Width: Make by the customer's order (+1.5mm--0mm)

UTS (MPa): 330-365

TYS (MPa): 380-420

Coating: PPG, Akzo, Valspar

Standard: EN 541 and EN 573-3

Coil weight: 2500kgs-3500kgs per Roller

